



## CoolSNAP<sub>cf</sub><sup>2</sup> Monochrome

1392 x 1040 imaging array | 4.65 x 4.65- $\mu$ m pixels



The CoolSNAP<sub>cf</sub><sup>2</sup> Monochrome camera from Photometrics® incorporates low-noise electronics and moderate CCD cooling to achieve good low-light sensitivity. A megapixel sensor with small, square elements ensures that each image shows extraordinary detail. This feature, along with a high-speed digitizer, shutterless operation, and an interline-transfer CCD, makes the CoolSNAP<sub>cf</sub><sup>2</sup> Monochrome camera ideal for high-resolution life science imaging applications.

Features	Benefits
20-MHz digitization	Fast image readout for high-speed focus and image capture
1392 x 1040 imaging array 4.65 x 4.65- $\mu$ m pixels	Resolves fine detail
Interline-transfer, progressive-scan CCD	Full resolution in every frame
Flexible binning and readout	Increases signal-to-noise while increasing the frame rate
IEEE-1394a or PCI interface	High-bandwidth, uninterrupted data transfer with no dropped frames
12-bit digitization	Quantifies bright and dim signals in the same image
Thermoelectric cooling	Low dark current allows longer integration times
C-mount	Easily attaches to microscopes, standard lenses, or optical equipment
Subcompact, fanless design	Low profile allows easy integration
Acquisition software	Captures, analyzes, and saves high-resolution images
PVCAM® Circular buffers Device sequencing  IEEE-1394a compatibility PCI compatibility	Supported by numerous third-party software packages Real-time focus Precise integration with shutters, filter wheels, etc.  <i>Windows® 2000/XP</i> <i>Windows 2000/XP, Mac OS X, and SUSE™ Linux® 9.2 (kernel version 2.6)</i>

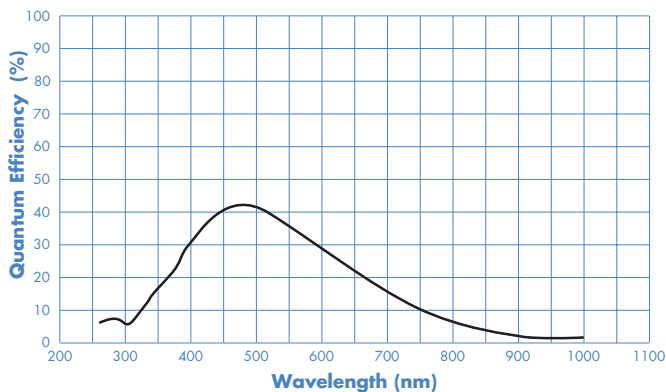


		Region		
		1392 x 1040	512 x 512	256 x 256
Binning	1 x 1	10	20	38
	2 x 2	20	37	62
	3 x 3	28	49	77
	4 x 4	35	59	90
	8 x 8	55	86	114

(Frames per second)

Note: Frame rates are measured at 20 MHz with 0-millisecond exposure times.

Specifications	
CCD image sensor	Sony® ICX205AL; interline-transfer, progressive-scan device with microlenses
CCD format	1392 x 1040 imaging array 4.65 x 4.65- $\mu$ m pixels 6.5 x 4.8-mm imaging area (optically centered) 1/2" format
Grade	Sony Grade 0
System Gain	3 e-/ADU
Linear full well	10,200 e-
Read noise	10 e- rms @ 20 MHz
Nonlinearity	<4%
Digitizer type	12 bits @ 20 MHz
Frame readout	96 ms/frame
CCD temperature	5°C below ambient
Dark current	<1 e-/p/s
Operating environment	15 to 30°C ambient, 0 to 80% relative humidity noncondensing
Dimensions	4.5" x 5.0" x 2.5" (1.9 lbs)
I/O	TTL output while exposing (BNC connector)

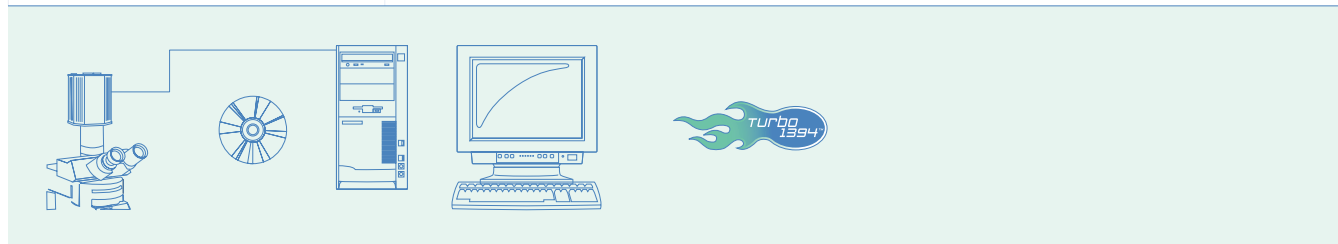

Note: Specifications are typical and subject to change.

CoolSNAP is a trademark of Roper Scientific, Inc. Photometrics, PVCAM, and Roper Scientific are registered trademarks of Roper Scientific, Inc. Linux is a registered trademark of Linus Torvalds. Mac OS is a trademark of Apple Computer, Inc., registered in the U.S. and other countries. Sony is a registered trademark of Sony Corporation. SUSE is a trademark of SUSE LINUX Products GmbH, a Novell business. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.

